




SEALED IN QUALITY

Intumescent Seals Installation Instructions

1. The seal needs to be located centrally in either the door leaf or frame.
2. Rout a groove suitable for seal size selected.
Clean groove and remove any dust.
Measure the length and cut with hacksaw, peel off self-adhesive backing from product and push fit into the routed groove applying pressure.
3. It is important to make sure that the seals are tightly butt jointed in the corners.
4. To achieve maximum adhesion seals must be applied to a clean and dry surface at temperatures between +5°C and +35°C.

Storage

Store in a cool and dry place (not above +35°C) with sufficient ventilation.

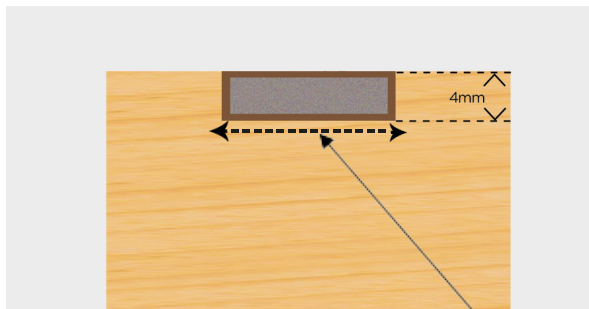

Width of groove depends on size of Intumescent ordered.